



HUSQVARNA 525HF3S

Powerful fixed pole hedge trimmer with a 26" double-sided cutter bar on a 32" shaft. The machine has a consistently robust design, including the gearbox, to withstand really tough work. The patented X-Torq engine means more power and less fuel consumption and exhaust emissions compared to a conventional engine.



Long life gear components

The gear components have been developed for long life under tough conditions.

Long cutter bar

Long cutter bar for extended reach


Low weight

The hedge trimmer's low weight and balanced centre of gravity make it easy to manoeuvre in different positions.



Engine position

The engine position also helps divert exhaust fumes away from the user.

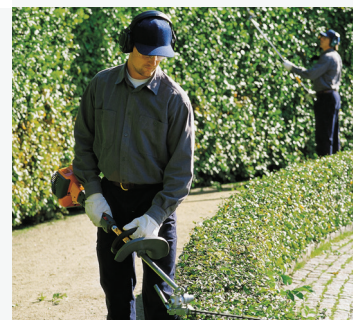

FEATURES

- Low weight, good balance, easy to manoeuvre
- Extended reach with long cutter bar
- Long life gear components
- Exhaust fumes diverted away from the user
- Auto return stop switch for easy starting
- Sharp, robust cutting knife for best capacity

Technical specifications	
CAPACITY	
Cutting speed	4339 cut/min
Recommended maximum twig diameter	24 mm
DIMENSIONS	
Full length, including cutting equipment	192 cm
Length, transportation mode - metric	192 cm
Weight	6.1 kg
ENGINE	
Cylinder displacement	25.4 cm ³
Electrode gap	0.65 mm
Fuel consumption	395 g/kWh
Fuel consumption	395 kg/h
Fuel tank volume	0.51 l
Idling speed	3000 rpm
Maximum power speed	8500 rpm
Power output	0.9 kW
Spark plug	NGK BPM8Y
EQUIPMENT	
Knife adjustment range, up/down Down	0°
Knife adjustment range, up/down Up	0°
Knife Length	65 cm
Teeth opening	30 mm
SOUND AND NOISE	
Sound power level, guaranteed (LWA)	105 dB(A)
Sound power level, measured	106 dB(A)
Sound pressure level at operators ear	92 dB(A)
TRANSMISSION	
Gear ratio	1
Gear ratio	5.53
VIBRATION	
Equivalent vibration level (ahv, eq) front handle	3.9 m/s ²
Equivalent vibration level (ahv, eq) rear handle	2.9 m/s ²
Engine Family EPA	EHQZS.0254GB
Engine Family CARB	EHQZS.0254GB
Exhaust emissions (CO average)	354.3 g/kWh
Exhaust emissions (CO FEL)	536 g/kWh
Exhaust emissions (CO average)	1052 g/kWh
Exhaust emissions (HC+NOx FEL)	50 g/kWh
Exhaust emissions (HC average)	37.7 g/kWh
Exhaust emissions (NOx average)	0.1 g/kWh
Exhaust emissions (PM FEL)	2 g/kWh
Useful life category	300 hrs
Approval certificate number	e13*97/68SH2G3*2012/46*0765*00
Basic model	GZ26S16
Emission durability period (EDP)	300 hrs
Exhaust emissions (CO average)	354.3 g/kWh
Exhaust emissions (CO FEL)	805 g/kWh
Exhaust emissions (CO average)	1052 g/kWh
Exhaust emissions (HC+NOx FEL)	50 g/kWh
Exhaust emissions (HC average)	37.7 g/kWh
Exhaust emissions (NOx average)	0.1 g/kWh
Useful life category	300 hrs
Engine Family EU	GZ26S
EU type approval	Stage 2
Exhaust emissions (CO average)	87.57 g/kWh
Exhaust emissions (HC+NOx FEL)	19.38 g/kWh
Exhaust emissions (NOx average)	0.56 g/kWh

PXM_SPAREPARTS



FUEL FILTER FOR MOST OF OUR
HANDHELD PRODUCTS
503 44 32-01



504 11 50-01



PURGE BUBBLE
503 93 66-01